

CLOPAY COMMERCIAL – MODEL 3715

**energy series** with intellicore®



Model 3715, 14'2" x 14" doors


CONSTRUCTION	EFFICIENCY	WARRANTY
<b>1 3/8"</b> THICKNESS	<b>12.9</b> R-VALUE	<b>10YR</b> LIMITED CONSTRUCTION



## POLYURETHANE INSULATED STEEL DOORS WITH MINOR RIBS

Clopay Model 3715 is an ideal choice for commercial and industrial facilities where economy is required without sacrificing reliability and workmanship.


- **Intellicore®** insulation provides the highest energy efficiency, while remaining environmentally friendly.
- **Steel-Sandwich Construction** enhances durability and strength.
- **3-Stage Paint Process** delivers a virtually maintenance-free finish.
- **Thermal Break** enhances insulating properties for extreme energy efficiency.
- **Optional Accessories** add functionality while complementing the building.



Panels are preprimed inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.


[clopaycommercial.com](http://clopaycommercial.com)

## PANEL DESIGN



Minor Ribbed

## COLOR OPTIONS

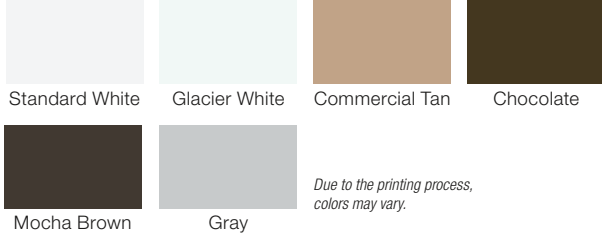

Due to the printing process, colors may vary.

## CUSTOM PAINT OPTION



Color Blast® offers more than 1,500 Sherwin-Williams® color options to complement your building design. This durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

## FEATURES

- STANDARD HARDWARE
- 18 gauge single-end stiles; 16 gauge double-end stiles
- PVC vinyl astragal with aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Heavy-duty galvanized end stiles
- Inside slide lock for increased security
- 19 gauge steel hinge support plates
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

MATERIALS AND CONSTRUCTION	
Panel Thickness	1-3/8" (34.9 mm)
Insulation	CFC and HCFC-free Intellicore® polyurethane
R-value	12.9*
Thermal Break	Continuous foam
Exterior Steel	27 gauge (.016" min.) (.41 mm)
Interior Steel	28 gauge (.015" min.) (.38 mm)
Exterior Surface	Stucco embossed, minor ribbed
Max Width	18'2" (5.5 m)
Max Height	16' (4.9 m)
Exterior Colors	Standard White, Glacier White, Commercial Tan, Chocolate, Mocha Brown and Gray. Also available in Color Blast®.
Interior Color	Standard White
Limited Warranties	10-Year delamination 10-Year rust-through 1-Year material and workmanship

\*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.

## ADDITIONAL OPTIONS

### WINDOW OPTIONS



Available with insulated, insulated tempered or tempered glass. Full-view section, pre-painted Standard White or Chocolate; glazing options include DSB, tempered, plexiglass, and insulated. 26" x 13" (66.04 cm x 33.02 cm) windows are available with Lexan® or plexiglass.

### HEAVY-DUTY HARDWARE (where not standard)



Double-end hinge

3" Track

High performance hardware features 10 gauge end hinges, heavy-duty top bracket and 3" sealed roller with 5/8" stem.

### MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

### EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WINDCODE® doors are available in many sizes and pressure ratings.

### HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

## CODE COMPLIANT

This Clopay door complies with the 2015 IECC (International Energy Conservation Code) with an air infiltration rating of .40 cfm/ft² or less (IECC, Section 402.5.2), and also meets the U-factor requirement of .37 or less (IECC, Section C402.4, for Climate Zones 1 through 8).



For more information on these and other Clopay products, call 1-800-526-4301 or visit [clopaycommercial.com](http://clopaycommercial.com)



©2017 Clopay Building Products Company, Inc., a Griffon company.

