

CLOPAY COMMERCIAL – MODELS 3720, 3721, 3723 energy series with intellicore®



Model 3720, 22'2" x 14' doors

CONSTRUCTION	EFFICIENCY	WARRANTY
2" THICKNESS	18.4 R-VALUE	10YR LIMITED CONSTRUCTION



POLYURETHANE INSULATED STEEL DOORS

Clopay Models 3720, 3721 and 3723 are for commercial and industrial facilities where ease of maintenance, versatility and durability considerations are all important.

- **Intellicore®** insulation provides the highest energy efficiency, while remaining environmentally friendly.
- **Steel-Sandwich Construction** enhances durability and strength.
- **3-Stage Paint Process** delivers a virtually maintenance-free finish.
- **Thermal Break** enhances insulating properties for extreme energy efficiency.
- **Optional Accessories** add functionality while complementing the building.




Panels are preprimed inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.

PANEL DESIGN




COLOR OPTIONS

MODEL 3720

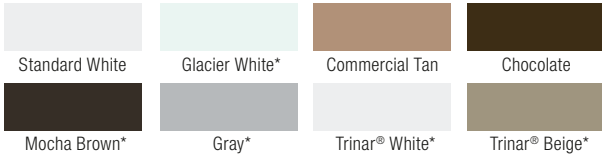

ADDITIONAL COLORS FOR MODELS 3721, 3723



CUSTOM PAINT OPTION



Color Blast® offers more than 1,500 Sherwin-Williams® color options to complement your building design. This durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

FEATURES

STANDARD HARDWARE

- 18 gauge single-end stiles; 16 gauge double-end stiles
- PVC vinyl astragal with aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Heavy-duty galvanized end stiles
- Inside slide lock for increased security
- 19 gauge steel hinge support plates
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

MATERIALS AND CONSTRUCTION

Panel Thickness	2" (50.8 mm)
Insulation	CFC and HCFC-free Intellicore® polyurethane
R-value	18.4*
Thermal Break	Continuous foam
Exterior Steel	27 gauge (.016" min.) (.41 mm)
Interior Steel	28 gauge (.015" min.) (.38 mm)
Exterior Surface	Stucco embossed, minor ribbed (3720) Woodgrain embossed, flush (3721) Woodgrain embossed, elegant raised (3723)
Max Width	3720: 36'2" (11 m); 3721, 3723: 24'2" (7.4 m)
Max Height	3720: 26' (7.9 m); 3721, 3723: 18' (5.5 m)
Exterior Colors	Standard White, Glacier White, Almond, Desert Tan, Sandtone, Commercial Tan, Chocolate, Mocha Brown, Gray, Trinar® White and Trinar® Beige. Also available in Color Blast®.
Interior Color	Standard White
Limited Warranties	10-Year delamination 10-Year rust-through 1-Year material and workmanship

*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.




For more information on these and other Clopay products, call 1-800-526-4301 or visit clopaycommercial.com



©2018 Clopay Building Products Company, Inc., a Griffon company.

ADDITIONAL OPTIONS

WINDOW OPTIONS

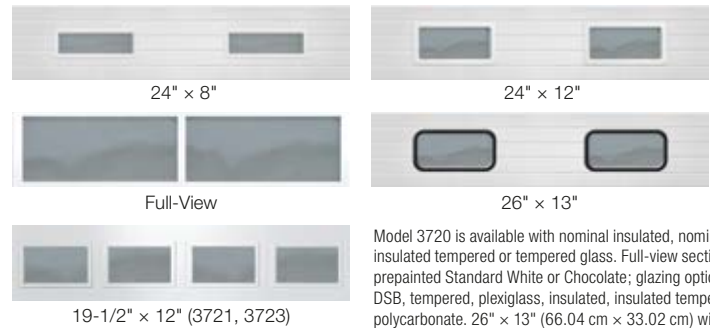

Model 3720 is available with nominal insulated, nominal insulated tempered or tempered glass. Full-view section, preprinted Standard White or Chocolate; glazing options include DSB, tempered, plexiglass, insulated, insulated tempered and polycarbonate. 26" x 13" (66.04 cm x 33.02 cm) windows are available with Lexan® or plexiglass. Models 3721 and 3723 are available with DSB, plexiglass and insulated glass.

HEAVY-DUTY HARDWARE (where not standard)



Double-end hinge

3" Track

High performance hardware features 10 gauge end hinges, heavy-duty top bracket and 3" sealed roller with 5/8" stem.

MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

BREAK-AWAY SECTION*



Single section and double sections available on select sizes.

PASS DOOR*



32" wide x 80" high (.81 m x 2.3 m), max 16'2" (4.9 m) wide section.

EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WindCode® doors are available in many sizes and pressure ratings.



Upgrade your standard door with industrial-grade components.

*Not available on Models 3721 and 3723.

HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

CODE COMPLIANT

This Clopay door complies with the 2015 IECC (International Energy Conservation Code) with an air infiltration rating of .40 cfm/ft² or less (IECC, Section 402.5.2), and also meets the U-factor requirement of .37 or less (IECC, Section C402.4, for Climate Zones 1 through 8).

