

Tri Lite Stop & Go

Signaling Systems

Tri Lite Stop & Go lights increase safety by providing visual communication anywhere a positive go / no-go signal is required.

Common Applications:

- *Loading Docks*
 - *Car Washes*
 - *Parking Lots and Garages*
 - *Drive Thru Windows*
 - *Controlled Access Entrances*
- Models with long life, energy efficient LEDs or economical incandescent signal lamps.
 - Available in two unit sets (for mounting on opposite sides of door) or single units that can stand alone or be connected to auxiliary safety systems.
 - Durable plastic housing (in safety yellow or black) will not rust, pit, or corrode.
 - Integral eyebrow-type sun visors provide extended visibility while shielding the lights from rain and snow.
 - Shallow depth of unit reduces risk of damage and convenient mounting holes provide simple installation.
 - UL & cUL Listed - Available in 12VDC, 24VDC and 115VAC.



SINCE 1922


Tri Lite, INCORPORATED

1642 North Besly Court • Chicago, Illinois 60622

Phone: 773-384-7765 • Fax: 773-384-5115 • www.triliteinc.com



MADE IN THE U.S.A.

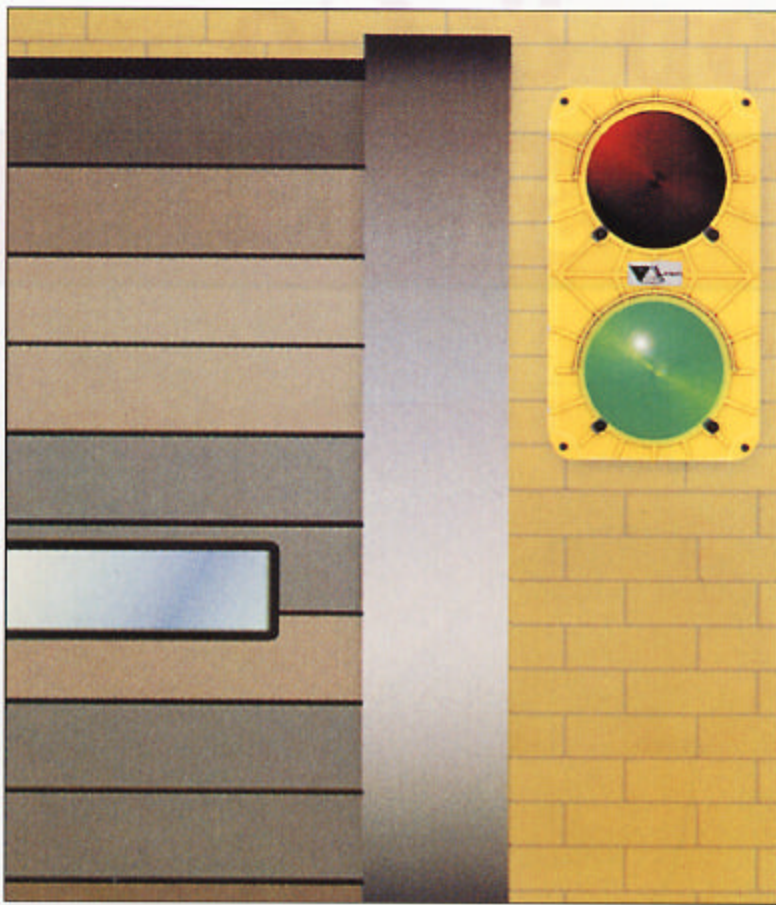

Tri Lite's Stop & Go Signaling System Alerts Truck Drivers and Loading Dock Personnel to the Safety Status of Docked or Docking Trucks...

The SG30 System utilizes two units – one outside of the loading dock and one located on the inside. The system is controlled by a toggle switch mounted on the inside light. (Remote switching is possible.) When the outside light is flashing red the inside light is green. This tells drivers not to move the truck and indicates that loading and unloading may proceed. When the toggle is flipped, the red light inside warns dock workers to stay out of the trailer, and green tells the driver he is free to move the vehicle.

The SG10 is available for applications where opposing signals are not required. Ideal for installations utilizing external controllers such as drive thru indicators and for OEM applications.

TECHNICAL SPECIFICATIONS

Housing	Safety Yellow or Black Polypropylene
Power Source	12 or 24 volt DC operation or 115 volt AC operation
Lens diameter	4 1/2"
Dimensions	11 3/4" H x 6 7/8" W x 3 3/4" D
Shipping weight	2 lbs. per unit

Super Bright LED Signals

- Reduce energy costs by 90% compared to conventional incandescent lights
- No filament means long life
- Require no maintenance
- Three year limited warranty on LED
- Loading dock warning signs available

CONFIGURATIONS AVAILABLE

STOP & GO LIGHT SET (includes 1-SG10, 1-SG20)				STOP & GO LIGHT, WITH FLASHER AND SWITCH				STOP & GO LIGHT, NO FLASHER OR SWITCH*			
Item #	Style	Voltage	Amps	Item #	Style	Voltage	Amps	Item #	Style	Voltage	Amps
SG30-12RG	Incandescent	12v	4.34	SG20-12RG	Incandescent	12v	2.17	SG10-12RG	Incandescent	12v	2.17
SG30-12RG-LED	LED	12v	0.60	SG20-12RG-LED	LED	12v	0.30	SG10-12RG-LED	LED	12v	0.13
SG30-24RG	Incandescent	24v	2.20	SG20-24RG	Incandescent	24v	1.10	SG10-24RG	Incandescent	24v	1.10
SG30-24RG-LED	LED	24v	0.60	SG20-24RG-LED	LED	24v	0.30	SG10-24RG-LED	LED	24v	0.13
SG30-115RG	Incandescent	115v	0.42	SG20-115RG	Incandescent	115v	0.21	SG10-115RG	Incandescent	115v	0.21
SG30-115RG-LED	LED	115v	0.06	SG20-115RG-LED	LED	115v	0.03	SG10-115RG-LED	LED	115v	0.10

*Models and specifications subject to change

*Designed for use with SG20 or control panel with flasher
Incandescent models require flasher for proper operation.



SINCE 1922

Tri Lite, INCORPORATED

1642 North Besly Court • Chicago, Illinois 60622

Phone: 773-384-7765 • Fax: 773-384-5115 • www.triliteinc.com

