

Section Thickness: 2"  
 Section Heights: 18", 21" & 24" standard

Panel Material: 6063-T6 Aluminum




Panel Profile: Aluminum stile and rail frame construction with full view glass

End Stiles:  $\leq 16'-2"$  wide = 4" /  $\geq 16'-3"$  wide = 8"  
 Center Stiles: 2"  
 Top Rail:  $\leq 20'-2"$  wide = 4" /  $\geq 20'-3"$  wide = 8"  
 Intermediate Rails: 2"  
 Bottom Rail:  $\leq 18'-2"$  wide = 4" /  $\geq 18'-3"$  wide = 8"  
 16'-3" to 18'-2" wide with 1/4" or 1/2" glass = 8"

Insulation: Not available

Color: Clear Anodized, C.H.I. White powder-coating, RAL# powder-coating

Glazing Options: 1/8"; Clear DSB, Polycarbonate, Tempered, Tinted, Frosted, Tempered Tinted, Tempered Frosted / 1/4"; Tempered, Tempered Tinted, Tempered Frosted, Clear Laminated, White Laminated / 1/2"; Insulated, Tinted Insulated Frosted Insulated, Low-E Insulated, Tempered Insulated, Tempered Low-E Insulated, Tempered Tinted Insulated, Tempered Frosted Insulated / 10mm Triple Wall Poly Insulated / Aluminum panels / Insulated Aluminum panels / Perforated aluminum panels

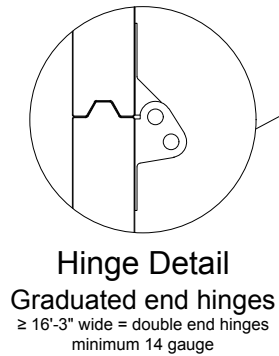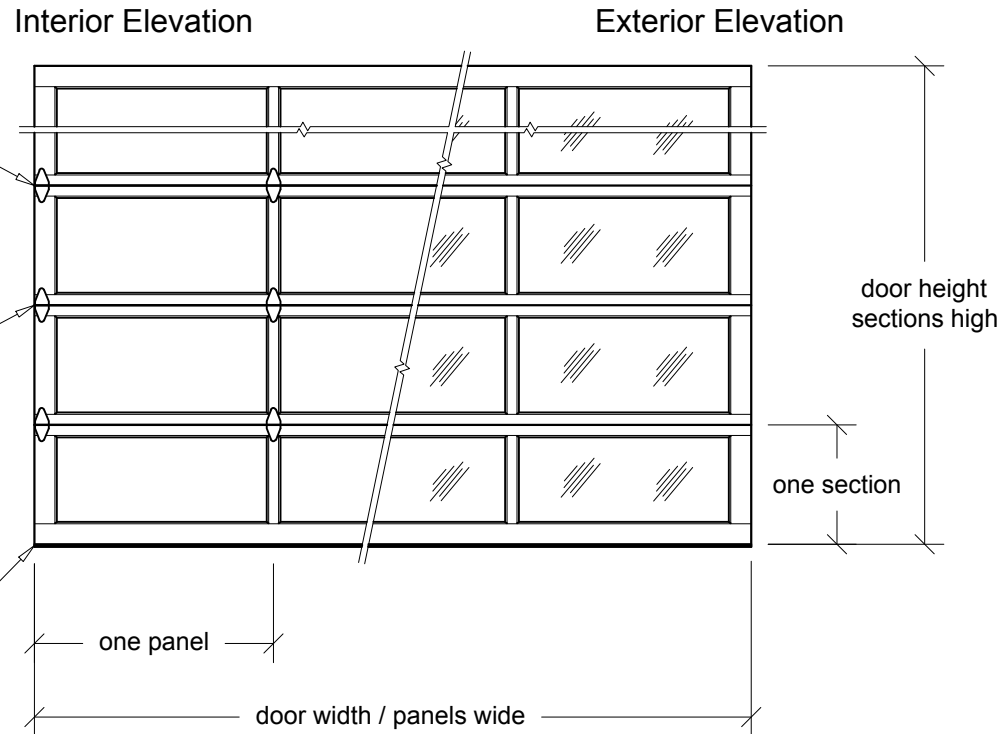

Door Width	Standard Panels Wide	Door Height	Standard Sections High
08'-00" to 09'-05"	2	06'-06" to 08'-00"	4
09'-06" to 12'-11"	3	08'-03" to 10'-00"	5
13'-00" to 16'-05"	4	10'-03" to 12'-00"	6
16'-06" to 20'-02"	5	12'-03" to 14'-00"	7
Available in 1" width increments		14'-03" to 16'-00"	8
		Available in 3" height increments	

Contact C.H.I. for available custom section heights, panel widths & door heights outside of listed pricebook charts

Values are for standard product, contact C.H.I. for options

REV. July/2018

Door Mark	Door Width	Door Height	Door Type	Project Name	Prepared By
Door Quantity	Opening Width	Opening Height	Jamb Type	Operation	Date
Quote Number	Panels Wide	Sections High	Color	Door Company	Sheet
Architect				Contractor	

